

# Amana® Commercial

Project #: \_\_\_\_\_

Item #: \_\_\_\_\_



Model RFS12TS shown

## Medium Volume

### Amana Commercial Microwave Model RFS12TS

#### Power Output

- 1200 watts of power.
- Five power levels for consistent, delicious results for frozen, refrigerated and fresh foods - from the freezer to table in minutes.

#### Easy to Use

- 1.2 cubic ft. (.034 m<sup>3</sup>) capacity accommodates a 14" (356 mm) platter and ideal for prepackaged foods.
- Up to 100 programmable menu items simplifies cooking and ensures consistent results.
- Four stage cooking option with one-touch programming. Reduces prep time, labor and food waste while providing consistent results.
- Controls are user friendly and require minimal training.
- Multiple quantity pad calculates the proper cook times for multiple portions.
- Time entry option adds flexibility.
- See-through door and lighted interior for monitoring without opening the door.
- Stackable to save valuable counter space.
- Interior ceramic shelf is sealed and recessed to reduce plate-to-shelf edge impact and keep spills contained.
- Braille touch pads for ADA compliance.

#### Easy to Maintain

- Stainless steel exterior and interior for easy cleaning and a professional look.
- Constructed to withstand the foodservice environment.
- Removable air filter and a clean filter reminder protects the oven components.
- Full 3 year warranty.
- Backed by the ACP, Inc. 24/7 ComServ Support Center, 866-426-2621.
- ETL Listed.

#### Medium Volume

This category of microwave is ideal for...

#### Applications:

- Prep stations
- Pubs
- Family restaurants

#### Through put potential:


- 6 oz. portion, refrigerated Macaroni & Cheese, 40+ per hour
- 1 baked potato, 17+ per hour
- 6 each (1.5 oz.) batch of refrigerated hamburger patties, 15 batches per hour (60 patties)



All ACP, Inc. commercial ovens are backed by our Culinary Center. Call us with any question regarding food preparation, menu development and cooking times. 866-426-2621.




# Amana Commercial Microwave Model RFS12TS | Medium Volume

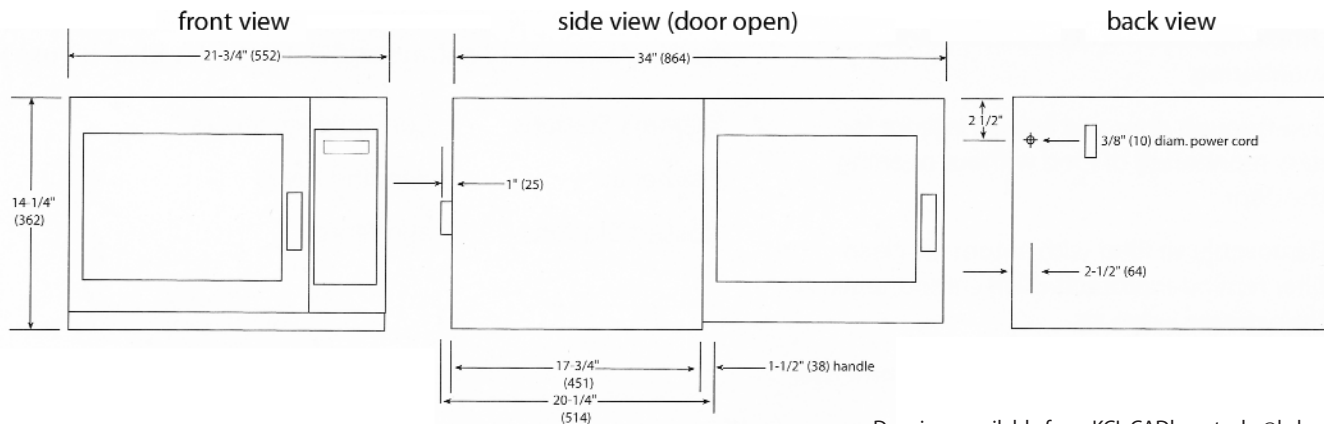

Drawings available from KCL CADlog - techs@kclcad.com

## Specifications

Model	RFS12TS	UPC Code 728028020878
Configuration	Countertop	
Control System	Touch	
Programmable Control Pads	10	
Settings Programmable	100	
Max. Cooking Time	60:00	
Power Levels	5	
Defrost	Yes	
Time Entry Option	Yes	
Microwave Distribution	Rotating antennas, top and bottom	
Magnetron	2	
Display	LED	
Stackable	Yes	
Stage Cooking	Yes, 4	
Interior Light	Yes	
Door Opening	Lift and pull handle	
Signal	Adjustable, end of cycle	
Air Filter	Yes, removable with clean filter reminder	
Multiple Quantity Setting	Yes, up to 2 portions	
Exterior Dimensions	H 14 1/4" (362)	W 21 3/4" (550) D** 20 1/4" (514)
Cavity Dimensions	H 9" (226)	W 14 1/4" (362) D 16 3/8" (416)
Door Depth	34" (864mm), 90°+ door open	
Usable Cavity Space	1.2 cubic ft. (.034 m <sup>3</sup> )	
Exterior Finish	Stainless steel	
Interior Finish	Stainless steel with sealed-in ceramic shelf	
Power Consumption	1800 W, 15 A	
Power Output*	1200 W* Microwave	
Power Source	120V, 60 Hz, 20 A single phase	
Plug Configuration / Cord	NEMA 5-20	5' (1.5 m) 
Frequency	2450 MHz	
Product Weight	64 lbs. (29 kg.)	
Ship weight (approx.)	71 lbs. (32 kg.)	
Shipping Carton Size	L 22 3/4" (580)	W 25 3/4" (654) D 18 1/2" (464)
UPS Shippable	Yes	

Measurements in ( ) are millimeters

\* IEC 705 Tested

\*\* Includes handle

## Specifications

Commercial microwave 10 touch pad control panel shall be programmable with the ability to program up to 100 menu items and shall have automatic cooking capability for up to two portions. Touch pad shall include Braille for ADA compliance. Cooking timer shall be 60 minute, countdown style with a time entry option and an adjustable end of cycle audible signal. LED display shall be backlit. There shall be 5 power levels, 4 cooking stages and defrost mode. Microwave output shall be 1200 watts distributed by two magnetrons with a rotating antenna to provide superior even heating throughout the cavity. Heavy duty door shall have a tempered glass window and a lift and pull handle with a 90°+ opening for easy access. An interior light shall facilitate monitoring without opening the door. The large 1.2 cubic ft. (.034 m<sup>3</sup>) cavity shall accommodate a 14" (356 mm) platter. Interior ceramic shelf shall be sealed and recessed on oven bottom to reduce plate-to-shelf edge impact. Oven shall have a stainless steel interior and exterior and be stackable to save counter and shelf space. Air filter shall be easily accessible and removable from the front of the oven and have a "clean filter" reminder feature. Microwave oven shall comply with standards set by the U.S Department of Health and Human Services, ETL for safety and sanitation.



## Warranty

Full 3 year warranty:

All 3 years – parts, labor, and travel are covered.

## Service

All products are backed by the ACP, Inc. 24/7 ComServ Support Center.



866-426-2621

